

4-Way Manifold

Easily splits a supply to four different outlet feeds

Overview

Speedfit 4 way plastic push-fit manifold for splitting a main supply line into four reduced outlet feeds. Simply push the pipe fully onto the fitting. To demount the connection, push the collet towards the body of the fitting and pull the pipe to release.

The fitting is up to 40% faster to install than traditional methods and is easier to use in confined spaces by removing the need for hot works and tools.

Designed, manufactured and assembled in the UK.

Features & Benefits

- Instant push-fit connection
- Install and demount in seconds without tools
- Safe flame-free installation, with no hot works, glue or flux
- Grip & Seal collet with stainless steel teeth and main O-Ring seal
- Non-toxic, resists corrosion and no scale build-up
- Suitable for use with JG Speedfit PEX and polybutylene barrier pipe (inserts required) and copper pipe
- Suitable for hot, cold and central heating applications



Product code	Description	Size	Bag QTY
SFM512210E	4 Way Manifold	22 x 10mm	5



50 year guarantee when used with JG Speedfit Layflat PB and PEX Barrier Pipes


4-Way Manifold

Working parameters & specifications

Application	Usual working temperature °C	Maximum working temperature °C	Maximum working pressure, bar
Cold Water (indirect and direct mains)	20	20	12
Central Heating	82	92	3
Hot Water (including unvented cylinders)	65	95	6

Mat	
Body	Polyphenylene Sulphide, Black
O-Ring	Ethylene Polypropylene Diene Monomer (EPDM)
Collet	Polyphenylene Sulphide, Black
Collet Teeth	Stainless Steel 301

Dimensions – All measurements in mm unless stated

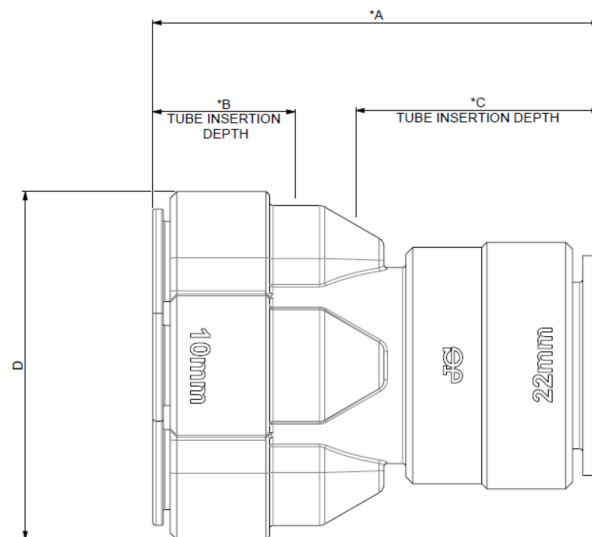

Product code	A	B	C	D
SFM512210E	62	20	34	51