

Elbow Pattern Hose

Connects a supply to a tap or other fixture or appliance

Overview

Speedfit elbow pattern flexi hose that connects the water supply to a male thread appliance. On one end the hose features a push-fit connection for a supply pipe. On the other end there is a 90 degree bent nut which can be tightened on to a side entry tap, toilet or male thread. To demount the push-fit end, push the collet towards the body of the fitting and pull the pipe release.

The fitting is quicker and easier to install in confined spaces than traditional methods as it eliminates the need for hot works or tools.

Designed, manufactured and assembled in the UK.

Features & Benefits

- An alternative to hard piping to a tap or fixture
- Flexible design makes installation hassle free
- Safe flame-free installation, with no hot works, glue or flux
- Braided stainless steel outer layer protects the internal feed from damage
- Grip & Seal collet with stainless steel teeth and main O-Ring seal
- Suitable for use with JG Speedfit PEX and polybutylene barrier pipe (inserts required) and copper pipe
- Suitable for hot and cold water only (6 Bar @ 65 °C)



Product code	Description	Size	Bag QTY
300mm			
FLX36P	Elbow Pattern	15mm x 1/2" BSP	2

Working parameters & specifications

Application	Usual working temperature °C	Maximum working temperature °C	Maximum working pressure, bar
Cold Water (indirect and direct mains)	20	20	12
Hot Water (including unvented cylinders)	65	95	6


Materials

1/2" BSP Hose Barb	Nickel Plated Brass
1/2" BSP Captive Nut	Nylon 66, 40% Mineral Filled
1/2" BSP Washer	Ethylene Propylene, Black
Ferule 13mm O/D	Stainless Steel
13mm Reinforced Flexible Hose	Braided Stainless Steel

Materials 15mm x 1/2" ID Hose Connector Assembly

Body	Polyacetal (Unfilled), Light Grey
O-Ring	Ethylene Polypropylene Diene Monomer (EPDM)
Collet	Polyacetal (Unfilled), Light Grey, Stainless Steel
Washer	Polyacetal (Unfilled), Natural
Caps	Polyacetal (Unfilled), Light Grey

Dimensions – All measurements in mm unless otherwise stated

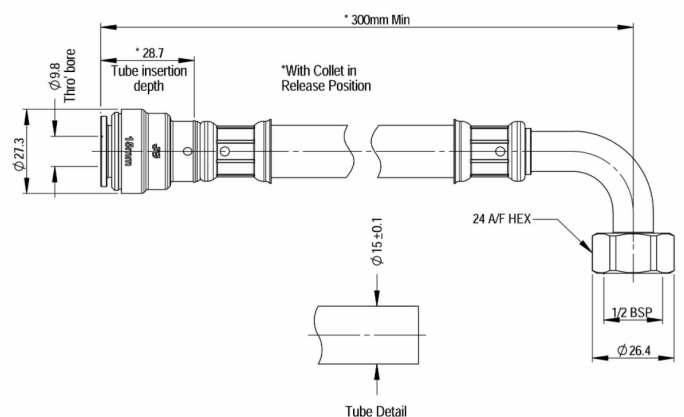

50 year guarantee when used with JG Speedfit Layflat PB and PEX Barrier Pipes